


Professional Flash Unit

- ▶ Integrated 2.4 GHz receiver
- ▶ Dual mode – the flash is compatible with **Canon** and **Nikon** cameras
- ▶ **Guide number 56** (ISO 100, 180 mm)
- ▶ High speed synchronisation up to 1/8.000 sec.
- ▶ TTL Flash mode
- ▶ Manual mode
- ▶ Master/Slave mode
- ▶ FEB (flash bracketing)
- ▶ Strobe flash mode
- ▶ Rear-curtain synchronisation

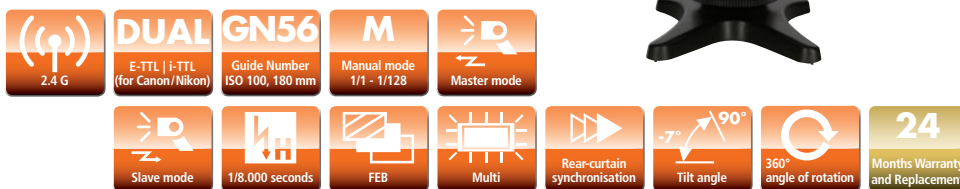

Scope of Delivery

Rollei Pro Flash Unit 56F for Canon / Nikon, Protective bag, Micro base, Soft box, USB cable and User manual

Technical Features

Guide Number	56 (ISO 100, 180mm)
Motorised Zoom	18 – 180 mm; manual / automatic zoom
TTL Flash Mode	TTL, M, FEB, 2.4 G Master, 2.4 G Slave, S1, S2, Multi
Wireless Trigger	2.4 G wireless flash, light pulse, S1/S2 optical flash
WL Visual Flash Distance	Indoor up to 30 meters Outdoor up to 50 meters
WL Transmission Range 2.4 GHz	Up to 50 meters
Swivel Reflector	Tilt angle (up and down): -7° up to +90° Rotation angle (left and right): 0° up to +180°
Slave Group and Unit	16 Slave communication channels (1 – 16) 3 Slave unit groups (A,B,C)
Color Temperature	5500 K
Flash Duration	1/200 seconds ~ 1/20,000 seconds
High Speed Synchronisation	Up to 1/8,000 seconds
Flash Control	1/128 – 1/1 step length is 0.3 EV, total 22 fine-tuning gear
Peripheral Interface	Hot shoe, PC sync, USB (for firmware updates only)
Recycle Time	3.0 seconds
Power	4x AA batteries or 4x AA Ni-MH batteries (any batteries are not included)
Lighting Time	100 ~ 1500 times
Additional Function	Sleep mode, overheating protection
Dimensions Weight	WxHxD: 75 x 200 x 60 mm 418 g (without any batteries)

Subject to technical changes. Canon and Nikon are registered trademarks, Canon and Nikon products are trademarks or registered trademarks of Canon and Nikon.